

DOOR AND FRAME SCHEDULE											
MARK	DOOR			FRAME					FIRE RATING	SET NO	NOTES
	TYPE	SIZE		MATL	MATL	TYPE	DETAIL				
		WD	HGT				HEAD	JAMB			
D01	E1	3'	7'	metal	metal	E2	H1/A0.4	J1/A0.4		C	
D02	E1	3'	7'	metal	metal	E2	H1/A0.4	J1/A0.4		B	
D03	E1	3'	7'	metal	metal	E2	H1/A0.4	J1/A0.4		A	
D04	E3	6'	7'	metal/glass	metal	E2	H1/A0.4	J1/A0.4		E	
EX01	E1	exist	exist	--	--	exist	--	--		E	new lockset
EX02	E1	exist	exist	--	--	exist	--	--		E	new lockset

## HARDWARE SCHEDULE

ALL EGRESS DOORS SHALL BE OPERABLE IN THE DIRECTION OF TRAVEL WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE.

HARDWARE ITEM	A	B	C	D	E	EX1	DESCRIPTION
LATCH/LOCK AND LEVER SET							SCHLAGE AL SERIES, CYLINDRICAL LATCH AND LOCKSETS. OR APPROVED EQUAL BY SEARGENT, OR BEST LOCK, OR YALE.
		OFFICE LOCKSET	STORE ROOM	RESTROOM	PASSAGE SET	ENTRY SET	EXISTING STOREFRONT DOOR HARDWARE
LEVER LOCKSET	X	X	X	X			SCHLAGE SATURN LEVER 626
HINGES		X	X	X	X		BOMMER #5000 - 5 KNUCKLE, FULLY MORTISED BUTT HINGE (QTY. 3) OR EQUAL BY HAGER.
DOOR STOP		X	X	X			IVES #WS401CVX / WS402 CVX GRAY RUBBER STOPPER
SILENCERS		X		X			IVES SR66 OR EQUIVALENT
COAT HOOK		X		X			IVES 405 COMMERCIAL/PUBLIC GRADE ALUM CAST COAT/HAT HOOK
CLOSER				X			IVES 405
KICK PLATE			X		X		24" HIGH METAL FULL WIDTH OF DOOR
HOLD OPEN			X				IVES PLUNGER TYPE FS1163
CRASH BAR						X	
						X	CONTRACTOR TO COORDINATE SECURITY REQUIREMENTS WITH OWNER.

## DOOR AND HARDWARE NOTES:

G.C. to provide full submittal package of all Doors and Hardware prior to proceeding with work.

See Architectural Plans A1.1 for symbol locations.

All hardware finishes to be US26D UON.

G.C. to coordinate and provide all necessary cut-outs in door and millwork frames for security cabling, locking devices, and accessories. G.C. to coordinate work between trades. Procure template from owners' security vendor and coordinate as required.


All egress doors shall be operable in the direction of travel without the use of a key or special knowledge.

All hardware requirements indicated in plans and specifications shall be coordinated with Owner for all items prior to placement of materials order.

All lockes to be Sergeant master-keyed; confirm with Owner.


Hardware specified for each leaf unless otherwise noted.

Clean and adjust existing hardware to remain.

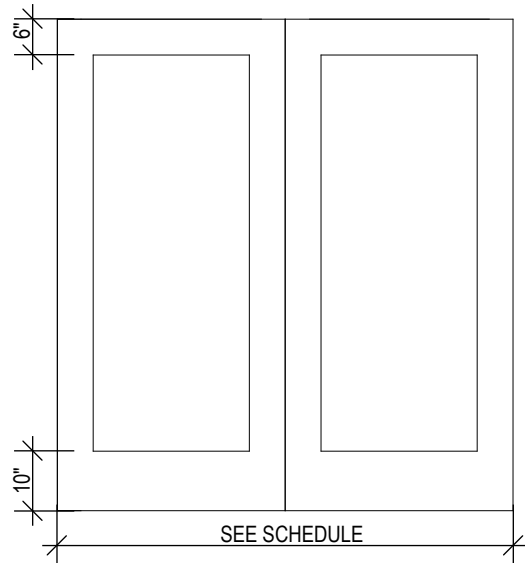


### E3 Glass Door Type

SCALE: 3/8" = 1'-0"

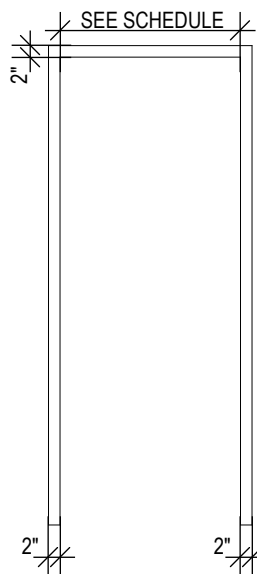

### E2 Frame Type

SCALE: 3/8" = 1'-0"

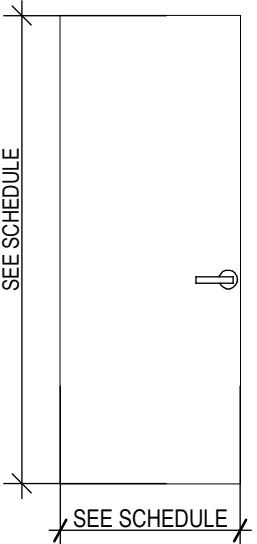

### E1 Door Type

SCALE: 3/8" = 1'-0"

1010 Wisconsin Avenue, NW  
Suite 405  
Washington, DC 20007

T 202-466.6116  
F 202-466.6235  
E GEN@COREdc.com

architecture | design

CORE

DB

CB

DT

PN

ISSUED FOR

I CERTIFY THAT THESE DOCUMENTS  
WERE PREPARED OR APPROVED BY ME,  
AND THAT I AM A DULY LICENSED  
ARCHITECT UNDER THE LAWS OF  
THE DISTRICT OF COLUMBIA

Door Types / Hardware Schedule

A0.5